



CONNECTORS



RESCO
SUPPLYING THE COOPERATIVE ADVANTAGE



TABLE OF CONTENTS

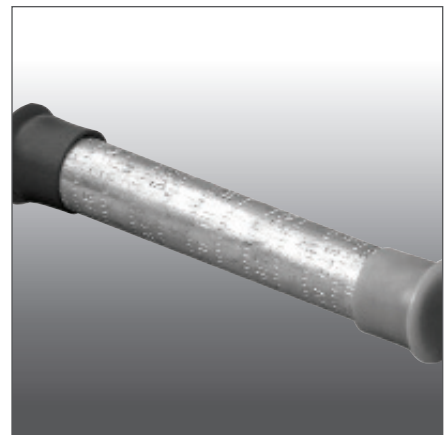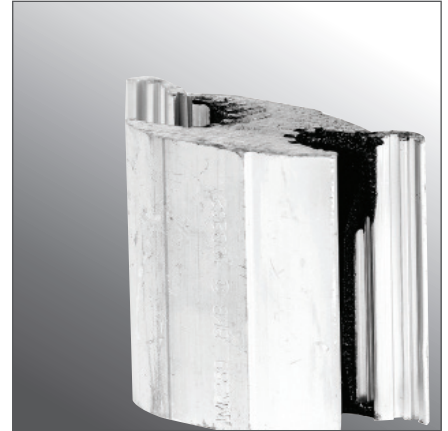



Compression Connectors:4 - 11
H-Tap, Terminal, Splice

Stirrup Connectors7 - 8


Automatic Splices & Deadends..... 11 - 12

Mechanical & Apparatus Grounding 12 - 14

Covers & Floodseals 15

Ampact 15

Multi-Tap Secondary 15

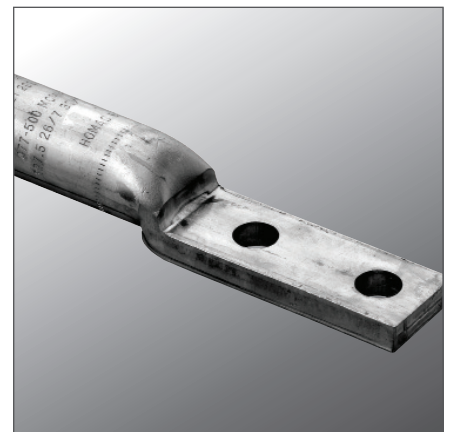

CONNECTORS









IMAGE	RESCO PART #	DESCRIPTION	MFR MODEL #	MANUFACTURER	PACK. QTY.
	17011309BLACKBURN	Aluminum Wide Range H-Type Compression Connector Main: 3 - 6 ACSR, 2 - 6 Stranded, 1 - 4 Solid Tap: 8 - 14 Stranded, 8 - 14 Solid, Die: 5/8 OR BG	WR9	THOMAS & BETTS	50
	17011339BLACKBURN	Aluminum Wide Range H-Type Compression Connector Main: 1/0 - 4 ACSR, 2/0 - 3 Stranded, 2/0 - 2 Solid Tap: 8 - 10 Stranded, 6 - 10 Solid Groove C: 12 - 14 Stranded, 12 - 14 Solid, Die: O	WR139	THOMAS & BETTS	25
	17011349BLACKBURN	Aluminum Wide Range H-Type Compression Connector Main: 4 - 6 ACSR, 3 - 6 Stranded, 2 - 6 Solid Tap: 4 - 6 ACSR, 3 - 6 Stranded, 2 - 6 Solid, Die: O	WR149	THOMAS & BETTS	25
	17011359BLACKBURN	Aluminum Wide Range H-Type Compression Connector Main: 2 - 6 ACSR, 1 - 6 Stranded, 2 - 6 Solid Tap: 2 - 6 ACSR, 1 - 6 Stranded, 2 - 6 Solid, Die: O	WR159	THOMAS & BETTS	25
	17011379BLACKBURN	Aluminum Wide Range H-Type Compression Connector Main: 1/0 - 3 ACSR, 1/0 - 2 Stranded, 1/0 - 1 Solid Tap: 4 - 6 ACSR, 3 - 6 Stranded, 2 - 6 Solid, Die: O	WR179	THOMAS & BETTS	25
	17011389BLACKBURN	Aluminum Wide Range H-Type Compression Connector Main: 1/0 - 3 ACSR, 2/0 - 2 Stranded, 3/0 - 1 Solid Tap: 2 - 6 ACSR, 1 - 6 Stranded, 1/0 - 6 Solid, Die: O	WR189	THOMAS & BETTS	25
	17011399BLACKBURN	Aluminum Wide Range H-Type Compression Connector Main: 1/0 - 3 ACSR, 1/0 - 2 Stranded, 1 Solid Tap: 2 - 4 ACSR, 1 - 4 Stranded, 1 - 2 Solid, Die: O	WR199	THOMAS & BETTS	25
	17011319BLACKBURN	Aluminum Wide Range H-Type Compression Connector Main: 1/0 - 1 ACSR, 1/0 - 1 Stranded Tap: 1/0 - 2 ACSR, 1/0 - 1 Stranded, Die: D, D3	WR219	THOMAS & BETTS	25
	17011410BLACKBURN	Aluminum Wide Range H-Type Compression Connector Main: 1/0 - 4 ACSR, 2/0 - 4 Stranded, 1 - 2 Solid Tap: 1/0 - 4 ACSR, 2/0 - 4 Stranded, 1 - 2 Solid, Die: O	WR1010	THOMAS & BETTS	25
	17021359BLACKBURN	Aluminum Wide Range H-Type Compression Connector Main: 1/0 - 2 ACSR, 2/0 - 1 Stranded Tap: 1/0 - 2 ACSR, 2/0 - 2 Stranded, Die: D, D3	WR259	THOMAS & BETTS	25
	17021379BLACKBURN	Aluminum Wide Range H-Type Compression Connector Main: 2/0 - 1 ACSR, 3/0 - 1/0 Stranded, 4/0 - 2/0 Solid Tap: 2/0 - 1 ACSR, 3/0 - 1/0 Stranded, 3/0 - 2/0 Solid Die: D, D3	WR279	THOMAS & BETTS	25
	17021389BLACKBURN	Aluminum Wide Range H-Type Compression Connector Main: 2/0 - 1/0 ACSR, 3/0 - 2/0 Str. Tap: 2 - 6 ACSR, 1 - 6 Stranded, 1/0 - 6 Solid, Die: D, D3	WR289	THOMAS & BETTS	25
	17031379BLACKBURN	Aluminum Wide Range H-Type Compression Connector Main: 4/0 - 3/0 ACSR, 4/0 Stranded Tap: 2 - 6 ACSR, 1 - 6 Stranded, 1/0 - 6 Solid, Die: D, D3	WR379	THOMAS & BETTS	25
	17031399BLACKBURN	Aluminum Wide Range H-Type Compression Connector Main: 4/0 - 3/0 ACSR, 4/0 - 3/0 Stranded Tap: 2/0 - 1 ACSR, 2/0 - 1/0 Stranded, 3/0 - 2/0 Solid	WR399	THOMAS & BETTS	25
	17041319BLACKBURN	Aluminum Wide Range H-Type Compression Connector Main: 4/0 - 3/0 ACSR, 4/0 - 3/0 Stranded Tap: 4/0 - 3/0 ACSR, 4/0 - 3/0 Stranded, Die: D, D3	WR419	THOMAS & BETTS	25
	17041715BLACKBURN	Aluminum Wide Range H-Type Compression Connector Main: 397 18/1 - 266 ACSR, 400 - 250 Stranded Tap: 2/0 - 6 ACSR, 2/0 - 6 Stranded, 3/0 - 6 Solid, Die: N	WR715	THOMAS & BETTS	10
	17041775BLACKBURN	Aluminum Wide Range H-Type Compression Connector Main: 397 18/1 - 4/0 ACSR, 400 - 4/0 Stranded Tap: 397 18/1 - 4/0 ACSR, 400 - 4/0 Stranded, Die: N	WR775	THOMAS & BETTS	5

IMAGE	RESCO PART #	DESCRIPTION	MFR MODEL #	MANUFACTURER	PACK. QTY.
	17041779BLACKBURN	Aluminum Wide Range H-Type Compression Connector Main: 397 18/1 - 266 ACSR, 400 - 250 Stranded Tap: 397 18/1 - 266 ACSR, 400 - 250 Stranded, 397-477 Solid	WR779	THOMAS & BETTS	5
	17041815BLACKBURN	Aluminum Wide Range H-Type Compression Connector Main: 477 18/1 - 4/0 ACSR, 556 - 250 Stranded Tap: 2/0 - 6 ACSR, 2/0 - 6 Stranded, 3/0-6 Solid, Die: N	WR815	THOMAS & BETTS	10
	17041835BLACKBURN	Aluminum Wide Range H-Type Compression Connector Main: 477 18/0 - 4/0 ACSR, 556 - 250 Stranded Tap: 4/0 - 1/0 ACSR, 4/0 - 1/0 Stranded, 4/0 - 2/0 Solid	WR835	THOMAS & BETTS	5
	17041885BLACKBURN	Aluminum Wide Range H-Type Compression Connector Main: 477 18/1 - 4/0 ACSR, 500 - 4/0 Stranded Tap: 477 18/1 - 4/0 ACSR, 500 - 4/0 Stranded, Die: N	WR885	THOMAS & BETTS	5
	OB101BLACKBURN	Aluminum H-Type Compression Connectors, #2 - 1/0 ACSR/#6 - #2 ACSR Length 1-3/8", Die O	OB101	THOMAS & BETTS	50
	17081232HOMAC	Connector Strip, 2/0 - 1/0 ACSR 2 Solid Bail	DB 202 ST	THOMAS & BETTS	25
	17014088KEARNEY	Aluminum Squeezon™ Connector, 4 - 1/0 - 6 - 2 ACSR	508-82	COOPER POWER SYSTEMS	50
	17014030KEARNEY	Copper Squeezon™ Connector, 4 - 8 Solid, 6 - 8 Stranded	301-82	COOPER POWER SYSTEMS	100
	17014032KEARNEY	Copper Squeezon™ Connector, 2 - 6 Solid, 4 - 6 Stranded	302-82	COOPER POWER SYSTEMS	100
	17014033KEARNEY	Copper Squeezon™ Connector, 1/0 - 2/0 Solid, 1/0 - 2 Stranded	303-82	COOPER POWER SYSTEMS	100
	17051322BLACKBURN	Copper H-Type Compression Connector Main: 4, 2 Solid CU, Main: 4 Stranded CU	CF22-1	THOMAS & BETTS	100
	17051323BLACKBURN	Copper H-Type Compression Connector Main: 4, 2 Solid CU, 4 Stranded CU, Tap: 6, 4, 2 Solid CU	CFS22-1	THOMAS & BETTS	100
	17051344BLACKBURN	Copper H-Type Compression Connector Main: 6 TR; 4, 6 Solid CU, Tap: 8, 4, 6 Solid CU, Tap: 6 Stranded CU	CF44-1	THOMAS & BETTS	100
	17051325BLACKBURN	Copper H-Type Compression Connector Main: 1/0, 1, 2 Stranded CU, Tap: 4 Stranded CU Tap: 2, 4, 6 Solid CU	CF102-1	THOMAS & BETTS	100
	17051326BLACKBURN	Copper H-Type Compression Connector Main: 4/0, 3/0, 2/0 Stranded CU, Tap: 4 Stranded CU, Tap: 2, 4 Solid CU	CF402-1	THOMAS & BETTS	100
	17051320BLACKBURN	Copper H-Type Compression Connector Main: 1/0, 1, 2 Stranded CU, Tap: 1/0, 1, 2 Stranded CU	CF1010-1	THOMAS & BETTS	100
	17051319BLACKBURN	Copper H-Type Compression Connector Main: 2/0, 1/0 Stranded CU, Tap: 2/0, 1/0	CF2020-1	THOMAS & BETTS	100
	17051321BLACKBURN	Copper H-Type Compression Connector Main: 4/0, 3/0, 2/0 Stranded CU, Tap: 4 Stranded CU, Tap: 2, 1, 1/0 Stranded CU	CF4010-1	THOMAS & BETTS	50
	17051318BLACKBURN	Copper H-Type Compression Connector Main: 4/0, 3/0, 2/0 Stranded CU, Tap: 4/0, 3/0	CF4040-1	THOMAS & BETTS	50

Madison, WI

Mt. Pleasant, MI

Williston, ND

Kearney, NE

Moorhead, MN

Elkhart, IA

Pierre, SD

CONNECTORS
















IMAGE	RESCO PART #	DESCRIPTION	MFR MODEL #	MANUFACTURER	PACK. QTY.
	17051322BURNDY	Copper H-Type Compression Connector, 2 - 6 AWG (Main & Tap 1), 8 - 14 AWG (Tap 2 & Tap 3), Tin Plated	YH2C2C	BURNDY LLC	200
	17051350HOMAC	Copper C-Type Compression Tabs, Wire Range Groove A: 2 Solid - 2 Stranded, Wire Range Groove B: 2 Solid - 2 Stranded, Installation Dies TM or C, Length 3/4"	CC22	THOMAS & BETTS	100
	17051349HOMAC	Copper C-Type Compression Tabs, Wire Range Groove A: 2 Solid - 2 Stranded, Wire Range Groove B: 8 Solid - 4 Stranded, Installation Dies TM or C, Length 3/4"	CC24	THOMAS & BETTS	100
	17051345HOMAC	Copper C-Type Compression Tabs, Wire Range Groove A: 6 Solid - 4 Stranded, Wire Range Groove B: 4 Solid - 4 Stranded, Installation Dies TU, BG, 5/8, Length 5/8"	CC44	THOMAS & BETTS	100
	17051348HOMAC	Copper C-Type Compression Tabs, Wire Range Groove A: 6 Solid - 4 Stranded, Wire Range Groove B: 6 Solid - 6 Stranded, Installation Dies TU, BG, 5/8, Length 5/8"	CC46	THOMAS & BETTS	100
	17051345BURNDY	Copper Compression Tap Connector, 6 Solid - 4 Stranded/4 Solid - 4 Stranded CU	YC4C4	BURNDY LLC	100
	17051202HOMAC	Aluminum Compression Pin Terminals - U5 Series Conductor Size AL - Solid, 1 & 2 Stranded, 2 ACSR, Installing Dies 5/8, 52, BG, TU, 8A, Solid CU Pin 4 (.204), Length 2"	U5U2	THOMAS & BETTS	50
	17051200HOMAC	Aluminum Compression Pin Terminals - U5 Series Conductor Size AL 2 Solid, 3 & 4 Stranded, 4 ACSR, Installing Dies 5/8, 52, BG, TU, 8A, Solid CU Pin 4 (.204), Length 2"	U5U4	THOMAS & BETTS	50
	17051203HOMAC	Aluminum Compression Pin Terminals - U5 Series Conductor Size AL - Solid, 1/0 Stranded, 1/0 ACSR, Installing Dies 5/8, 52, BG, TU, 8A, Solid CU Pin 2 (.257), Length 2-1/2"	U5U10	THOMAS & BETTS	50
	17051206HOMAC	Pigtail Compression Connector, 1/0 ACSR	X5U10-6	THOMAS & BETTS	25
	17051196HOMAC	Aluminum Compression Pin Terminals - X5 Series Conductor Size AL - Solid, 4/0 Stranded, 4/0 ACSR, Installing dies 840, WK840, 249, TX, 11A, Solid CU Pin 2/0 (.365), Length 3"	X5U40	THOMAS & BETTS	25
	17051332BLACKBURN	Compression Pin Terminal Aluminum, Contax filled for Wire Range 1/0 ASCR, 1/0 Stranded, Pigtail: 0.258 x 6, Mechanical Dies: 840, K840, TX, Hydraulic Dies: 840, B48EA, EEI 11A, K840, U249, 76	PKL36-1	THOMAS & BETTS	25
	17051208BLACKBURN	Compression Pin Terminal Aluminum, Contax filled for Wire Range 2/0 ASCR, 2/0 Stranded, Pigtail: 0.325 x 6, Mechanical Dies: 840, K840, TX, Hydraulic Dies: 840, B48EA, EEI 11A, K840, U249, 76	PKL46-1	THOMAS & BETTS	25
	17051210BLACKBURN	Compression Pin Terminal Aluminum, Contax filled for Wire Range 3/0 ASCR, 3/0 Stranded, Pigtail: 0.325 x 6, Mechanical Dies: 840, K840, TX, Hydraulic Dies: 840, B48EA, EEI 11A, K840, U249, 76	PKL56-1	THOMAS & BETTS	25

IMAGE	RESCO PART #	DESCRIPTION	MFR MODEL #	MANUFACTURER	PACK. QTY.
	17051212HOMAC	Pigtail Compression Connector, 4/0 ACSR	X5U40-6	THOMAS & BETTS	25
	17051214HOMAC	Pigtail Compression Connector, 250 - 350 ACSR	X5U336	THOMAS & BETTS	25
	17051330ANDERSON	Bi-Metallic Pin Terminals for Joining Aluminum Conductors to Copper Equipments, Types PT & PTH, 1 - 2 Stranded, 1/0 Solid, 2 Comp. Stranded	PT-22-6	HUBBELL POWER SYSTEMS	25
	17052500HOMAC	Aluminum Multi-Range Die-Less Lugs, Conductor Range AL or CU, 4/0 - 500 Stranded, Bolt size 1/2	SAB500NTN	THOMAS & BETTS	1
	66821200HOMAC	Aluminum Two-Hole NEMA Lugs - Straight Lug, Concentric 2-1, Compressed 1, Compact 1, ACSR 2, Bolt Size 1/0, Installing Dies TU, 52, BG, 243, 5/8, CSA22	SA2-N	THOMAS & BETTS	100
	17055850HOMAC	Aluminum Two-Hole Lugs - Common Die Series - Stacking Lugs, Conductors - AL or CU, Concentric 2/0, Compressed 2/0, Compact 3/0, Solid 3/0 ACSR 2/0 (6/1), Installing Dies TX, 76, 249, 840, 845, 11A, CSA 24	SA2/0N	THOMAS & BETTS	100
	66821312HOMAC	Aluminum Two-Hole NEMA Lugs - Straight Lug, Concentric 4/0, Installing Dies TX, 71H, 298, 840, 11A	AL4/0N	THOMAS & BETTS	50
	66821217BLACKBURN	Aluminum Two-Hole Lug - Straight Long Barrel, Wire Range 336 30/7, 26/7, 18/1, 397 18/1 ACSR, 336-400 Stranded, 500 kcmil, 1/2" Bolt Size, Blind-End, Hydraulic Dies: B80EA, EEI 13A, 655, 1-1/8, 96H, CSA 26	AL20	THOMAS & BETTS	25
	66821330BLACKBURN	Aluminum Two-Hole Lug - Straight Long Barrel, Wire Range 397 30/7, 26/7, 18/1, 477 18/1 ACSR, 450-500 Stranded, 550-600 Compact, 1/2" Bolt Size, Blind-End, Hydraulic Dies: B20AH, EEI 14A, 318, 1-5/16, CSA 28, 106H	ALS24	THOMAS & BETTS	20
	66821320BLACKBURN	Aluminum Two-Hole Lug - Straight Long Barrel, Wire Range 2 ACSR, 2 Stranded, 1/2" Bolt Size, Blind-End, Mechanical Dies: 5/8, Peach, BG, WBG, G, TU, Hydraulic Dies: B58CS, U-BG	AL584	THOMAS & BETTS	25
	66821340ANDERSON	Aluminum Single-Hole Lug, #4 ACSR	VAUL412	HUBBELL POWER SYSTEMS	50
	66821335ANDERSON	Aluminum Two-Hole Lug, #2 ACSR	VAUL112BN	HUBBELL POWER SYSTEMS	50
	66821350ANDERSON	Aluminum Two-Hole Lug, 4/0 ACSR	VAUL4012BN	HUBBELL POWER SYSTEMS	25
	66821351ANDERSON	Aluminum Two-Hole Lug, 397.5 ACSR	VAUL50012BN	HUBBELL POWER SYSTEMS	10
	66821370ANDERSON	Aluminum Two-Hole Lug, 556.5 ACSR	VAUL75012BN	HUBBELL POWER SYSTEMS	10
	66822360ANDERSON	Copper 2- Hole Lug, #6 - 1/0 Stranded	VHCL10516B	HUBBELL POWER SYSTEMS	10
	66822362ANDERSON	Copper 2- Hole Lug, 4/0 - 500 MCM	VHCL50012BN	HUBBELL POWER SYSTEMS	10
	17061350BLACKBURN	Compression Stirrup Contax Filled - 10" x 2-15/16" Stirrup 2 Solid Copper	7019	THOMAS & BETTS	100
	17061348BLACKBURN	Compression Stirrup Contax Filled - 4-1/2" x 3-3/4" Stirrup 2 Solid Copper	7030C	THOMAS & BETTS	100

Madison, WI

Mt. Pleasant, MI

Williston, ND

Kearney, NE

Moorhead, MN

Elkhart, IA

Pierre, SD

CONNECTORS












IMAGE	RESCO PART #	DESCRIPTION	MFR MODEL #	MANUFACTURER	PACK. QTY.
	17080990BURNDY	Tin-Plated Copper Bail	J990	BURNDY LLC	50
	17081345HOMAC	Anti-Rotational Hot Line Stirrups - Crank-Type, ACSR 3/0 - 4/0, Stranded 3/0 - 4/0, Width 10", Bail 2", Length 2-3/4", Die D	DST 402	THOMAS & BETTS	25
	17081352HOMAC	Anti-Rotational Hot Line Stirrups - Crank-Type, 2 - 6 ACSR, #2 Solid	OB 44 ST	THOMAS & BETTS	25
	17081372HOMAC	Anti-Rotational Hot Line Stirrups - Crank-Type, ACSR #6 - 1/0, Stranded #6 - 1/0, Width 9-1/2", Bail 2", Length 2-3/4", Die O	OB 103 ST	THOMAS & BETTS	25
	17083352HOMAC	Anti-Rotational Hot Line Stirrups - Crank-Type, ACSR 3/0 - 4/0, Stranded 3/0 - 4/0, Width 12", Bail 2", Length 2-3/4", Die D	DB 404 ST	THOMAS & BETTS	25
	17081352BLACKBURN	Compression Stirrup Contax Filled - Wire Range: #2 - #6 ACSR, #1 Stranded - #6 Solid AWG, Stirrup #2 Solid Copper	WRS-152	THOMAS & BETTS	25
	17081372BLACKBURN	Compression Stirrup Contax Filled - Wire Range: 1/0 - 3 ACSR, 1/0 Stranded - #1 Solid AWG, Stirrup #2 Solid Copper	WRS172	THOMAS & BETTS	25
	17051364BLACKBURN	Aluminum 2" Service Entrance Compression Splice for Wire Range - End A: 12 ACSR, 6 Stranded, 4 Solid, Blue, End B: 6 6/1 ACSR, 6 Stranded, 4 Solid, Blue, Die: 5/8	CS64	THOMAS & BETTS	100
	17051368BLACKBURN	Aluminum 2" Service Entrance Compression Splice for Wire Range - End A: 4 6/1, 7/1 ACSR, 3 - 4 Stranded, 2 Solid, Orange, End B: 4 6/1, 7/1 ACSR, 3 - 4 Stranded, 2 Solid, Orange, Die: 5/8	CS68	THOMAS & BETTS	100
	17051372BLACKBURN	Aluminum 2" Service Entrance Compression Splice for Wire Range - End A: 2 6/1, 7/1 ACSR, 1 - 2 Stranded, Orange, End B: 4 6/1, 7/1 ACSR, 3 - 4 Stranded, 2 Solid, Orange, Die: 5/8	CS72	THOMAS & BETTS	100
	17051373BLACKBURN	Aluminum 2" Service Entrance Compression Splice for Wire Range - End A: 2 6/1, 7/1 ACSR, 1 - 2 Stranded, Red, End B: 2 6/1, 7/1 ACSR, 1 - 2 Stranded, Red, Die: 5/8	CS73	THOMAS & BETTS	100
	17051377BLACKBURN	Aluminum 2" Service Entrance Compression Splice for Wire Range - End A: 1/0 ACSR, 1/0 Stranded, Red, End B: 2 6/1, 7/1 ACSR, 1 - 2 Stranded, Red, Die: 5/8	CS77	THOMAS & BETTS	100
	17051378BLACKBURN	Aluminum 2" Service Entrance Compression Splice for Wire Range - End A: 1/0 ACSR, 1/0 Stranded, Yellow, End B: 1/0 ACSR, 1/0 Stranded, Yellow, Die: 5/8	CS78	THOMAS & BETTS	100
	17251336BLACKBURN	Aluminum 3-1/2" Service Entrance Compression Splice for Wire Range - End A: 1/0 ACSR, 1/0 Stranded, 2/0 Stranded Compact, Yellow, End B: 1/0 ACSR, 1/0 Stranded, 2/0 Stranded Compact, Yellow, Die: 84	KL36-1	THOMAS & BETTS	25
	17251347BLACKBURN	Aluminum 3-1/2" Service Entrance Compression Splice for Wire Range - End A: 2/0 ACSR, 2/0 Stranded, 3/0 Stranded Compact, Gray, End B: 1/0 ACSR, 2/0 Stranded, 3/0 Stranded Compact, Gray, Die: 840	KL47-1	THOMAS & BETTS	25
	17251358BLACKBURN	Aluminum 3 1/2" Service Entrance Compression Splice for Wire Range - End A: 3/0 ACSR, 4/0 Stranded Compact, Black, End B: 3/0 ACSR, 3/0 Stranded, 4/0 Stranded Compact, Black, Die: 840	KL58-1	THOMAS & BETTS	25

IMAGE	RESCO PART #	DESCRIPTION	MFR MODEL #	MANUFACTURER	PACK. QTY.
	17251367BLACKBURN	Aluminum 3-1/2" Service Entrance Compression Splice for Wire Range - End A: 4/0 ASCR, 4/0 Stranded, Gray, End B: 2/0 ASCR, 2/0 Stranded, 3/0 Stranded Compact, Gray, Die: 840	KL67-1	THOMAS & BETTS	25
	17251369BLACKBURN	Aluminum 3-1/2" Service Entrance Compression Splice for Wire Range - End A: 4/0 ASCR, 4/0 Stranded, Black, End B: 4/0 ASCR, 4/0 Stranded, Black, Die: 840	KL69-1	THOMAS & BETTS	25
	17251347HOMAC	Uninsulated Aluminum Service Entrance Compression Splices - 840 Die Series, Conductor A: Gray, 3/0 Solid AL, - Solid CU, 2/0 Stranded, 2/0 ACSR, Conductor B: Gray, 3/0 Solid AL, - Solid CU, 2/0 Stranded, 2/0 ACSR	X1U2020	THOMAS & BETTS	100
	17251358HOMAC	Uninsulated Aluminum Service Entrance Compression Splices - 840 Die Series, 3/0 - 3/0 ACSR	X1U3030	THOMAS & BETTS	100
	17251369HOMAC	Uninsulated Aluminum Service Entrance Compression Splices - 840 Die Series, Conductor A: Pink, - Solid AL, - Solid CU, 4/0 Stranded, 4/0 ACSR, Conductor B: Pink, - Solid AL, - Solid CU, 4/0 Stranded, 4/0 ACSR	X1U4040	THOMAS & BETTS	25
	17251375HOMAC	Uninsulated Aluminum Service Entrance Compression Splices	X1U4040-10	THOMAS & BETTS	25
	60631361BLACKBURN	Aluminum 4-1/2" Service Entrance Compression Splice for Wire Range #6 ASCR, #6 Stranded, #4 Solid, Blue, Die: 5/8	TR61	THOMAS & BETTS	50
	60631363BLACKBURN	Aluminum 4 1/2" Service Entrance Compression Splice for Wire Range #4 ASCR, #4 Stranded, #2 Solid, Orange, Die: 5/8	TR63	THOMAS & BETTS	50
	60631364BLACKBURN	Aluminum 4-1/2" Service Entrance Compression Splice for Wire Range #2 ASCR, #2 Stranded, Red, Die: 5/8	TR64	THOMAS & BETTS	50
	17151346BLACKBURN	Aluminum 5-1/2" Service Entrance Compression Splice for Wire Range - End A: 1/0 ASCR, 2/0 Stranded, 1/0 Stranded Compact, Yellow, End B: 1/0 ASCR, 1/0 Stranded, 2/0 Stranded Compact, Yellow, Die: 840	IKL36	THOMAS & BETTS	30
	17261366BLACKBURN	Aluminum 5-1/2" Service Entrance Compression Splice for Wire Range - End A: 4/0 ASCR, 4/0 Stranded, Yellow, End B: 1/0 ASCR, 1/0 Stranded, Yellow, Die: 840	IKL66	THOMAS & BETTS	25
	17151364BLACKBURN	Aluminum 2-3/4" Service Entrance Compression Splice for Wire Range - End A: #6 ASCR, #6 Stranded, #4 Solid, Blue, End B: #6 ASCR, #6 Stranded, #4 Solid, Blue, Die: 5/8	ICS64-1	THOMAS & BETTS	100
	17151368BLACKBURN	Aluminum 2-3/4" Service Entrance Compression Splice for Wire Range - End A: #4 ASCR, #3 - #4 Stranded, #2 Solid, Orange, End B: #4 ASCR, #3 - #4 Stranded, #2 Solid, Orange, Die: 5/8	ICS68-1	THOMAS & BETTS	100
	17151372BLACKBURN	Aluminum 2-3/4" Service Entrance Compression Splice for Wire Range - End A: #2 ASCR, #1 - #2 Stranded, Orange, End B: #4 ASCR, #3 - #4 Stranded, #2 Solid, Orange, Die: 5/8	ICS72-1	THOMAS & BETTS	100
	17151373BLACKBURN	Aluminum 2-3/4" Service Entrance Compression Splice for Wire Range - End A: #2 ASCR, #1 - #2 Stranded, Red, End B: #2 ASCR, #1 - #2 Stranded, Red, Die: 5/8	ICS73-1	THOMAS & BETTS	100
	17151378BLACKBURN	Aluminum 2-3/4" Service Entrance Compression Splice for Wire Range - End A: 1/0 ASCR, 1/0, Yellow, End B: 1/0 Stranded, Yellow, Die: 5/8	ICS78-1	THOMAS & BETTS	100
	17056610HOMAC	Aluminum Straight Splices - Common Die Series - Concentric 1, Compressed 1, Compact 1/0, Solid 1/0	SAC1	THOMAS & BETTS	100
	17056602HOMAC	Aluminum Straight Splices - Common Die Series - Concentric 2, Compressed 2, Compact 1 and 2, Solid 1	SAC2	THOMAS & BETTS	50
	17056640HOMAC	Aluminum Straight Splices - Common Die Series - Concentric 4/0, Compressed 4/0, Compact 4/0, 250	SAC4/0	THOMAS & BETTS	100

Madison, WI

Mt. Pleasant, MI

Williston, ND

Kearney, NE










Moorhead, MN

Elkhart, IA

Pierre, SD

CONNECTORS

IMAGE	RESCO PART #	DESCRIPTION	MFR MODEL #	MANUFACTURER	PACK. QTY.
	60631366HOMAC	Aluminum Semi-Tension Neutral Compression Splice - Common Die Series, Conductor A: 1/0 ACSR, 1/0 Stranded, Conductor B: 1/0 ACSR, 1/0 Stranded, Installing Dies: TU, 52, 5/8, BG, 243, 8A	SNG00	THOMAS & BETTS	50
	60631364HOMAC	Aluminum Semi-Tension Neutral Compression Splice - Common Die Series, Conductor A: #2 ACSR, #2 Stranded, Conductor B: #2 ACSR, #2 Stranded, Installing Dies: TU, 52, 5/8, BG, 243, 8A	SNG22	THOMAS & BETTS	50
	60631363HOMAC	Aluminum Semi-Tension Neutral Compression Splices - Common Die Series, Conductor A: #4 ACSR, #4 Stranded, Conductor B: #4 ACSR, #4 Stranded, Installing Dies: TU, 52, 5/8, BG, 243, 8A	SNG44	THOMAS & BETTS	150
	17251300ANDERSON	VERSA-CRIMP® Compression Splice, Minimum Tension, #8 - 1/0 ACSR Conductor Range	VCSE-44	HUBBELL POWER SYSTEMS	50
	17251301ANDERSON	VERSA-CRIMP® Compression Splice, Minimum Tension, #6 - 2/0 ACSR Conductor Range	VCSE-55	HUBBELL POWER SYSTEMS	50
	17251302ANDERSON	VERSA-CRIMP® Compression Splice, Minimum Tension, #4 - 4/0 ACSR Conductor Range	VCSE-66	HUBBELL POWER SYSTEMS	25
	17251303ANDERSON	VERSA-CRIMP® Compression Splice, Minimum Tension, 2/0 - 336.4 ACSR Conductor Range	VCSE-77	HUBBELL POWER SYSTEMS	20
	60633312FARGO	Compression Jumper Terminal 3/8" EHS Steel	331225	HUBBELL POWER SYSTEMS	1
	60635206NATIONALTELE	Copperweld Repair Sleeve, 6A	R1-6A-P	NATIONAL TELEPHONE SUPPLY	50
	60635208NATIONALTELE	Copperweld Repair Sleeve, 8A	R1-8A-P	NATIONAL TELEPHONE SUPPLY	50
	60635228NATIONALTELE	Splicing Sleeve, 6A CULD	1-6A-P	NATIONAL TELEPHONE SUPPLY	50
	60635231NATIONALTELE	Splicing Sleeve, 8A CULD	1-8A-P	NATIONAL TELEPHONE SUPPLY	50
	60635232NATIONALTELE	Splicing Sleeve, #3 NO #12 Stranded CU	1-3/081-P	NATIONAL TELEPHONE SUPPLY	100
	60635234NATIONALTELE	Splicing Sleeve, #4 Solid CU	1-204-P	NATIONAL TELEPHONE SUPPLY	100
	60635240NATIONALTELE	Splicing Sleeve, #6 Solid CU	1-162J	NATIONAL TELEPHONE SUPPLY	100
	60632562KEARNEY	Aluminum Repair Sleeve, #4 ALUM - #4 ACSR, 12"	30811-12	COOPER POWER SYSTEMS	50
	60635250NATIONALTELE	Split Repair Sleeve, #4 ACSR	AR4-3 ORANGE	NATIONAL TELEPHONE SUPPLY	25
	60635252NATIONALTELE	Split Repair Sleeve, 1/0 ACSR	AR1/0 PLUM	NATIONAL TELEPHONE SUPPLY	25
	60631384BLACKBURN	Aluminum 18-1/2" Full-Tension Distribution Compression Splice for Wire Range: 4/0 ACSR (6/1), 4/0 AAAC (7), 4/0 5005 (7), 4/0 AAC (7), Hydraulic Dies: B61EA, 654, 1.00, 1-2	RC40	THOMAS & BETTS	20

IMAGE	RESCO PART #	DESCRIPTION	MFR MODEL #	MANUFACTURER	PACK. QTY.
	60631384BURNDY	Aluminum Full-Tension Compression Splice, 4/0 ACSR	YDS28RL	BURNDY LLC	25
	60616111FARGO	Copper Automatic Overhead Line Splice, #6 Solid, 3 #12 Copperweld Strand	GL-111	HUBBELL POWER SYSTEMS	100
	60616120FARGO	Copper Automatic Overhead Line Splice, #4 Solid, 8A Copperweld Strand	GL-112	HUBBELL POWER SYSTEMS	100
	60616113FARGO	Copper Automatic Overhead Line Splice, #3 Solid, #4 Stranded, 6A Copperweld Strand	GL-113	HUBBELL POWER SYSTEMS	100
	60616119FARGO	Copper Automatic Overhead Line Splice, #3 Solid - #4 Stranded/4 Solid	GL-152	HUBBELL POWER SYSTEMS	100
	60616125FARGO	Copper Automatic Overhead Line Splice, 6A x 8A	GL-1125	HUBBELL POWER SYSTEMS	100
	60616150FARGO	Automatic Guy Wire Splice, 3/8" HS, Com, S-M, Util 10M Strand (Bell)	GLS-5002	HUBBELL POWER SYSTEMS	50
	60616120MACLEAN	Copper Automatic Connector Splice, #4 Solid, #6 Stranded, 8A Copperweld Strand	41	MACLEAN POWER SYSTEMS	200
	60616113MACLEAN	Copper Automatic Connector Splice, #3 Solid - 6A Copperweld Strand	47	MACLEAN POWER SYSTEMS	200
	60616150MACLEAN	Steel Strandlink® Connector, 3/8" Universal Primary Strand Application	5002	MACLEAN POWER SYSTEMS	50
	60616039MACLEAN	Steel Strandlink® Connector, 3/16" Universal Primary Strand Application	5039	MACLEAN POWER SYSTEMS	50
	60616040MACLEAN	Steel Strandlink® Connector, 1/4" Universal Primary Strand Application	5040	MACLEAN POWER SYSTEMS	50
	60616151MACLEAN	Steel Strandlink® Connector, 7/16" Universal Primary Strand Application	5043	MACLEAN POWER SYSTEMS	25
	60616114MACLEAN	Copper Deadend Connector, #3 Solid - 6A Copperweld Strand	47LD	MACLEAN POWER SYSTEMS	50
	60616157FARGO	Automatic Guy Wire Deadend, 1/4" Primary Strand Application	GDE-5100	HUBBELL POWER SYSTEMS	50
	60616152FARGO	Automatic Guy Wire Deadend, 3/8" Primary Strand Applications	GDE-5102	HUBBELL POWER SYSTEMS	50
	60616153FARGO	Automatic Guy Wire Deadend, 3/8" EHS 3#5, 7#8, 7#9, 12.5M, 14M, 16M AW #4-2/5, #2-3/4, #1-5/2 AWAC Primary Strand Application	GDE-5202	HUBBELL POWER SYSTEMS	25
	60616152MACLEAN	Steel Strandlink® Connector, 3/8" Universal Primary Strand Application	5102	MACLEAN POWER SYSTEMS	50
	60616155MACLEAN	Steel Strandlink® Connector, 7/16" Universal Primary Strand Application	5203-L	MACLEAN POWER SYSTEMS	25

Madison, WI

Mt. Pleasant, MI

Williston, ND

Kearney, NE

Moorhead, MN

Elkhart, IA

Pierre, SD

CONNECTORS















IMAGE	RESCO PART #	DESCRIPTION	MFR MODEL #	MANUFACTURER	PACK. QTY.
	60631394FARGO	Aluminum Automatic Overhead Line Splice, #4 ACSR	GL-402A	HUBBELL POWER SYSTEMS	50
	60631395FARGO	Aluminum Automatic Overhead Line Splice, #2 - #4 ACSR	GL-4042A	HUBBELL POWER SYSTEMS	25
	60631386FARGO	Aluminum Automatic Overhead Line Splice, #2 ACSR	GL-404A	HUBBELL POWER SYSTEMS	25
	60631388FARGO	Aluminum Automatic Overhead Line Splice, 1/0 ACSR	GL-406A	HUBBELL POWER SYSTEMS	25
	60631397FARGO	Aluminum Automatic Overhead Line Splice, 3/0 ACSR	GL-408	HUBBELL POWER SYSTEMS	25
	60631393FARGO	Aluminum Automatic Overhead Line Splice, 4/0 ACSR	GL-409A	HUBBELL POWER SYSTEMS	25
	60631395MACLEAN	ConductRLink Connector, #2 - #4 ACSR	7652AP	MACLEAN POWER SYSTEMS	100
	60631388MACLEAN	ConductRLink Connector, 1/0 ACSR	7653	MACLEAN POWER SYSTEMS	50
	60631401MACLEAN	ConductRLink Connector, 1/0 - 2/0 ACSR	7654AP	MACLEAN POWER SYSTEMS	25
	60631399BLACKBURN	Autoset Automatic Tension Splice for Wire Range: 2 6/1, 7/1 ACSR, 2 AAAC, 2 AAC, Aluminum, Color Code 2: Red	ATS2	THOMAS & BETTS	25
	60631406BLACKBURN	Autoset Automatic Tension Splice for Wire Range: 4/0 6/1 ACSR, 4/0 AAAC, 4/0 AAC, Aluminum, Color Code: 4/0 - Pink	ATS40	THOMAS & BETTS	10
	60631400BLACKBURN	Autoset Automatic Tension Splice for Wire Range: 4 6/1, 7/1, 2 6/1, 7/1 ACSR, 4-2 AAAC, 4-2 AAC, Aluminum, Color Code: 4 - Orange, 2 - Red	ATS42	THOMAS & BETTS	25
	60631401BLACKBURN	Autoset Automatic Tension Splice for Wire Range: 1/0 6/1, 2/0 7/1 ACSR, 1/0-2/0 AAAC, 1/0-2/0 AAC, Aluminum, Color Code: 1/0 - Yellow, 2/0 - Gray	ATS1020	THOMAS & BETTS	25
	60631402BLACKBURN	Autoset Automatic Tension Splice for Wire Range: 3/0 6/1, 4/0 6/1 ACSR, 3/0-4/0 AAAC, 3/0-4/0 AAC, Aluminum, Color Code: 3/0 - Black, 4/0 - Pink	ATS3040	THOMAS & BETTS	10
	60631403BLACKBURN	Autoset Automatic Tension Splice for Wire Range: 266 18/1, 266 26/7, 336 18/1 ACSR, 312.8 AAAC, 266-336 AAC, Aluminum, Color Code: Green	ATS266336	THOMAS & BETTS	10
	17211302BLACKBURN	Transformer Tank Ground Connector for Wire Range 2/0 Stranded - #8 Solid, Stud Size 1/2" - 13"	TTC2	THOMAS & BETTS	100
	17211302HUBBELL	Bronze Alloy Ground Clamp, Eyebolt, #8 Solid - 2/0 Stranded Cable Range	GTC534A	HUBBELL POWER SYSTEMS	50

IMAGE	RESCO PART #	DESCRIPTION	MFR MODEL #	MANUFACTURER	PACK. QTY.
	17217603ANDERSON	Bronze Alloy Ground Clamp, Eyebolt	GTCS34ATP	HUBBELL POWER SYSTEMS	100
	17214038ANDERSON	Lightning Arrester Grounding Terminal, Eyebolt, Stud Size 3/8" - 16", #8 Solid - 2/0 Stranded Conductor Range	LAT 2/0	HUBBELL POWER SYSTEMS	50
	17457590FARGO	Bronze Vise-Type Grounding Stud, #6 Solid - 1/0 Stranded	GC-207	HUBBELL POWER SYSTEMS	25
	17457597FARGO	Bronze Vise-Type Grounding Stud, #3 Solid - 4/0 Stranded	GC-209	HUBBELL POWER SYSTEMS	20
	17457591FARGO	Bronze Lightning Arrester Grounding Terminal, Stud Size 3/8" - 16", #6 Solid - 1/0 Stranded	GC-207LA	HUBBELL POWER SYSTEMS	25
	17451320BLACKBURN	Aluminum Type PAE - Parallel Groove Clamp, Extruded Type for Wire Range Main: 2/0 ACSR - 6 Solid 6 AR Tap: 2/0 ACSR - 6 Solid 6 AR	PAE2121-9	THOMAS & BETTS	50
	17453975BLACKBURN	Aluminum Type PAE - Parallel Groove Clamp, Extruded Type for Wire Range Main: 397.5 ACSR - 3/0 str, 2/0 - 6 AR, Tap: 397.5 ACSR - 3/0 Stranded, 2/0-6 AR	PAE-3939-9-2	THOMAS & BETTS	10
	17451369BLACKBURN	Aluminum Type PAC - Aluminum Parallel Groove Clamp with Cast Copper Liner for Wire Range Main: 336.4 - 1/0, 1/0 - 6 AR ASCR 400 - 2/0 Stranded, 1/0 - 6 AR AL/CU, Tap: ASCR 1/0 Stranded - 8 Solid AL CU	PAC7	THOMAS & BETTS	1
	17450320ANDERSON	Aluminum Single-Center Bolt Parallel Groove Clamp, Main: #8 Solid - 1/0 Stranded AAC #8 - 1/0 ACSR, Tap: #8 Solid - 1/0 Stranded AAC #8 - 1/0 ACSR #8 Solid - 1/0 Stranded CU	LC51CXB	HUBBELL POWER SYSTEMS	25
	17450410ANDERSON	Aluminum Single-Center Bolt Parallel Groove Clamp, Main: #8 Solid - 2/0 Stranded AAC #8 - 2/0 ACSR, Tap: #8 Solid - 2/0 Stranded AAC #8 - 2/0 ACSR #8 Solid - 2/0 Stranded CU	LC52AXB	HUBBELL POWER SYSTEMS	25
	17455450ANDERSON	Aluminum Single-Center Bolt Parallel Groove Clamp, Main: #1 Solid - 400 MCM AAC #1-336.4 MCM ACSR, Tap: #8 Solid - 2/0 Stranded AAC #8 - 2/0 ACSR #8 Solid - 2/0 Stranded CU	LC52CXB	HUBBELL POWER SYSTEMS	25
	17453960HUBBELL	Aluminum Multiple Center 2-Bolt Parallel Groove Clamp, Main: 1/0 (19) - 400 MCM AAC 1/0 - 397.5 (18/1) ACSR, Tap: 1/0 (19) - 400 MCM AAC 1/0 - 397.5 (18/1) ACSR 1/0 Solid - 400 MCM CU	LC66AXB	HUBBELL POWER SYSTEMS	24
	17453975HUBBELL	Aluminum Multiple Center 3-Bolt Parallel Groove Clamp, Main: 350 - 556.5 MCM AAC 336.4 (18/1) - 477 (30/7) ACSR, Tap: 350 - 556.5 MCM AAC 336.4 (18/1) - 477 (30/7) ACSR 350 - 550 MCM CU	LC68AXB	HUBBELL POWER SYSTEMS	12

Madison, WI

Mt. Pleasant, MI

Williston, ND

Kearney, NE

Moorhead, MN

Elkhart, IA

Pierre, SD

CONNECTORS














IMAGE	RESCO PART #	DESCRIPTION	MFR MODEL #	MANUFACTURER	PACK. QTY.
	17454550KEARNEY	Parallel Groove Clamp, #4 Solid - 4/0 ACSR, #4 - #8 Stranded	9968-1	COOPER POWER SYSTEMS	6
	17457601BLACKBURN	Copper Type K - Jumper Clamp for Wire Range #8 - 1/0 ACSR, #8 - 2/0 Stranded Clamp Plated In One Groove	K1	THOMAS & BETTS	100
	17457601BURNDY	Jumper Clamp, 2/0 CU 1/0 ACSR	UCK1UL	BURNDY LLC	150
	17651355BLACKBURN	Type HPS Plated Split-Bolt Connector with Spacer made of Copper Alloy for Use on Copper, Aluminum, ACSR Conductors, Conductor Range for Equal Main and Tap 4/0 Stranded - 4 Solid	40HPS	THOMAS & BETTS	25
	17651362BLACKBURN	Type H High Strength Split-Bolt Connector made of Bronze Alloy for Use on Copper Conductors, Conductor Range for Equal Main and Tap #2 Solid - #6 Solid	2H	THOMAS & BETTS	100
	17651363BLACKBURN	Type H High Strength Split-Bolt Connector made of Bronze Alloy for Use on Copper Conductors, Conductor Range for Equal Main and Tap #3 Solid - #8 Solid	3H	THOMAS & BETTS	100
	17651365BLACKBURN	Type H High Strength Split-Bolt Connector made of Bronze Alloy for Use on Copper Conductors, Conductor Range for Equal Main and Tap #4 Solid - #8 Solid	4H	THOMAS & BETTS	100
	17651382BLACKBURN	Type H High Strength Split-Bolt Connector made of Bronze Alloy for Use on Copper Conductors, Conductor Range for Equal Main and Tap #4 Solid - #8 Solid	4H3	THOMAS & BETTS	100
	17651366BLACKBURN	Type H High Strength Split-Bolt Connector made of Bronze Alloy for Use on Copper Conductors, Conductor Range for Equal Main and Tap #6 Solid - #8 Solid	6H	THOMAS & BETTS	100
	17651371BLACKBURN	Type H High Strength Split-Bolt Connector made of Bronze Alloy for Use on Copper Conductors, Conductor Range for Equal Main and Tap 1/0 Stranded - #4 Solid	10H	THOMAS & BETTS	50
	17651365BURNDY	Copper Split Bolt, CU: 8 AWG (Stranded) - 4 AWG (Solid) (Run & Tap)	KS20	BURNDY LLC	100
	17651366BURNDY	Copper Split Bolt, CU: 8 AWG (Stranded) - 6 AWG (Solid) (Run & Tap)	KS17	BURNDY LLC	100
	17661396BLACKBURN	Type HPS Plated Split-Bolt Connector with Spacer made of Copper Alloy for Use on Copper, Aluminum, ACSR Conductors, Conductor Range for Equal Main and Tap #1 Stranded - #8 Solid	1HPS	THOMAS & BETTS	100
	17661397BLACKBURN	Type HPS Plated Split-Bolt Connector with Spacer made of Copper Alloy for Use on Copper, Aluminum, ACSR Conductors, Conductor Range for Equal Main and Tap 1/0 Stranded - #6 Solid	10HPS	THOMAS & BETTS	50

IMAGE	RESCO PART #	DESCRIPTION	MFR MODEL #	MANUFACTURER	PACK. QTY.
	18053402BLACKBURN	Insulating Polypropylene Cover for All 5/8" O Die Taps, Sleeves 2" Long or Less	C2-BB	THOMAS & BETTS	100
	18053405BLACKBURN	Insulating Polypropylene Cover for All O Die Taps, 1-3/4" Long or Less	C5-BB	THOMAS & BETTS	100
	18053407BLACKBURN	Insulating Polypropylene Cover for All D Die Taps, 2-1/2" Long or Less	C7	THOMAS & BETTS	100
	18053409BLACKBURN	Insulating Polypropylene Cover for All N and D Die Taps, up to 5" Long	C9L	THOMAS & BETTS	50
	18053407BURNDY	Insulating Cover for Compression C Connector	CCD	BURNDY LLC	25
	18053405BURNDY	Insulating Cover for Compression C Connector	CCO	BURNDY LLC	25
	18080500HOMAC	Flood-Seal Insulating Covers-FSS Series, Copper Conductor Range 14 - 500, Aluminum Conductor Range 14 - 500, Cable Insulation Diameter Range 0.150 - 1.175, Length 4-7/16"	FSS500	THOMAS & BETTS	100
	41002007AMP	AMPACT Tap Stirrup Connector, 336.4 - 336.4 ACSR*	602007	TYCO ELECTRONICS	5
	41003381AMP	Aluminum Tap System Tooling Accessory (AMPACT), Blue Cartridge*	69338-1	TYCO ELECTRONICS	25
	41003382AMP	Aluminum Tap System Tooling Accessory (AMPACT), Red Cartridge*	69338-2	TYCO ELECTRONICS	25
	41003384AMP	Aluminum Tap System Tooling Accessory (AMPACT), Yellow Cartridge*	69338-4	TYCO ELECTRONICS	25
	41003385AMP	Aluminum Tap System Tooling Accessory (AMPACT), White Cartridge*	69338-5	TYCO ELECTRONICS	25
	66004250CMC	Neutral Multi-Tap Connector	LP4-250I	CONNECTOR MANUFACTURING	24
	66004850CMC	Transformer Eyebolt Connector, 2-Conductor, #12 - 250 MCM	NP2-250I	CONNECTOR MANUFACTURING	24

***All AMPACT product available upon request.**

Madison, WI

Mt. Pleasant, MI

Williston, ND

Kearney, NE

Moorhead, MN

Elkhart, IA

Pierre, SD

CORPORATE – WISCONSIN

Office/ Warehouse

2250 Pinehurst Drive
Middleton, WI 53562
Sales Support: (800) 356-9370

MINNESOTA

Office/Warehouse

4100 30th Avenue South
Moorhead, MN 56560
Sales Support: (800) 346-3330

IOWA

Office/Warehouse

1308 NW Laurel Street
Elkhart, IA 50073
Sales Support: (888) 293-7372

MICHIGAN

Warehouse

1640 Gover Parkway
Mt. Pleasant, MI 48858
Sales Support: (800) 356-9370

NORTH DAKOTA

Warehouse

508 58th Street West
Williston, ND 58801
Sales Support: (800) 346-3330

SOUTH DAKOTA

Warehouse

3715 Airport Road
Pierre, SD 57501
Sales Support: (800) 346-3330

NEBRASKA

Warehouse

404 West 8th Street
Suite 2
Kearney, NE 68845
Sales Support: (888) 293-7372

info@resco1.com

www.resco1.com

STORM RESPONSE

(866) 273-5030

RESCO

